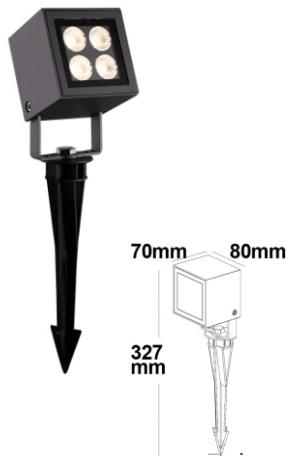


Model : arle / spi / n10

**TECHNICAL SPECIFICATION :**

- LED WATT : 08W (2WX4)
- Single Color (CCT) : 2750k , 2950k , 4000k, 6000k
- Multi color : RGB
- Lumen / watt : 110 lm - 140 lm
- CRI > 80
- THD<10%
- PF>0.95
- LED Type :COB
- LED Make : Edision / Nichia
- Available Beam Angle : 15°/30°/40°
- Input Voltage : 220V AC / 12V DC
- Dimensions : 70*80 mm , H 367 mm
- IP (Ingress Protection) : IP 66 / 67
- Outdoor Casing : All. Dicast
- Driver : Built In / Remote z

PRODUCT DESCRIPTION :

- Luminaries housing & bracket made of die cast aluminium, aluminium & SS fasteners
- Mounting earth spike or die-cast bracket arrangement to facilitate easy installation at any desired location.
- Luminaries supplied with one metre cable length and a IP67 connector.
- Silicone gasket for moisture protection
- Toughened step extra clear safety glass 4mm is flushed with SS trim to avoid dirt contamination
- Additional cable length to be ordered separately
- Sturdy construction in order to maintain performance of the luminaries and to reduce maintenance costs.
- Clear glass in the front with continuous rubber gasket to ensure adequate sealing against ingress of moisture, dust, insects etc.,
- Wire for mains supply cable 2c×1.5mm²
- Additional cable length to be ordered separately
- Dimming Option : Traic / Analog


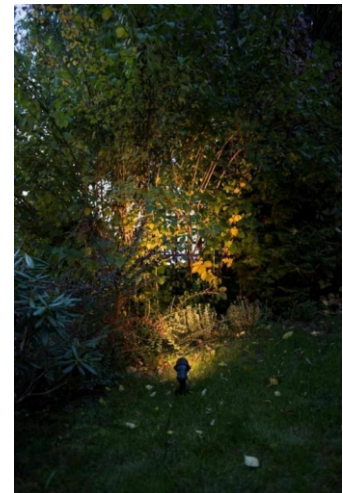

Area of Application

Pathways, Parks, Sculptures, Gardens, Structures and Landscape lighting.

Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black


**PHOTOMETRIC**

cd/klm BA : 25°, 3000K

— C0 - C180 — C90 - C270

h(m)	E(lx)	D(m)
0.5	4369	0.22
1.0	1092	0.44
2.0	485.4	0.66
2.5	273.0	0.89
3.0	121.3	1.33

1140cd

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**C0 PLANE ISOLUX DIAGRAM (UNIT:lx)**