


MICRO SMART

Model : arle / ing / k5

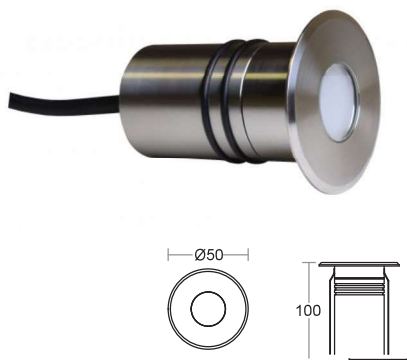

TECHNICAL SPECIFICATION :

- LED WATT : 01W/03W
- Single Color (CCT) : 2750k , 2950k , 4000k, 6000k
- Multi color : RGB
- Lumen / watt : 110 lm - 140 lm
- CRI > 80
- THD < 10%
- PF > 0.95
- LED Type : EMITTER / COB
- LED Make : CREE / Citizen
- Available Beam Angle : 15° / 25° / 30° / 45°
- Input Voltage : 12V / 24V AC/DC - 220V AC
- Dimensions : 50 mm , H 100 mm
- IP (Ingress Protection) : IP 65 / 67 / 68


PRODUCT DESCRIPTION :

- In-ground up lighter, ground embedded
- Available as a walk over or underwater application
- Construction - SS-304/SS-316 Body
- Outer housing in aluminium with open bottom for water drainage
- For flush recessed mounting in compacted surfaces, pathways and squares
- Generous flange widths for easy covering of holes
- Double silicone gasket for moisture protection
- Toughened step extra clear safety glass 8mm incorporated to avoid dirt contamination
- Extruded aluminium for better heatsink of LED
- For walk over static load maximum 2 ton

Optional : Honeycomb for Anti Glare



Optional : Waterproof Connector IP 68

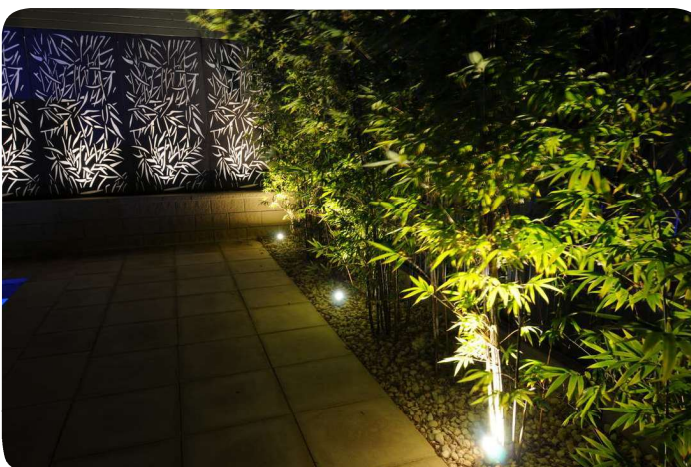

PHOTOMETRIC

