

MIDAS

Model : ar / bol / p5

PRODUCT DESCRIPTION :



- Luminaire body made of rectangular extruded aluminium tube with aluminium components and SS fasteners.
- Clear toughened glass.
- Mounting plate die cast aluminium double powder coat with an anchorage unit and stainless steel fixing screws.
- Mounting earth spike or die-cast bracket arrangement to facilitate easy installation at any desired location.
- Luminaires supplied with one metre cable length and a IP67 connector.
- Silicone gasket for moisture protection
- Additional cable length to be ordered separately
- Sturdy construction in order to maintain performance of the luminaires and to reduce maintenance costs.



TECHNICAL SPECIFICATION :

- LED WATT : 08W / 15W
- Single Color (CCT) : 2750k , 2950k , 4000k, 6000k
- Multi color : RGB
- Lumen / watt : 110 lm - 140 lm
- CRI > 80
- THD < 10%
- PF > 0.95
- LED Type : COB
- LED Make : Edision / Citizen
- Available Beam Angle : 120°
- Input Voltage : 12V DC
- Dimensions : 180x300 mm / 180x1000 mm
- IP (Ingress Protection) : IP 66
- Outdoor Casing : All. Dicast + PC Diff. sheet
- Driver : Built In / Remote

Area of Application

Pathways, Parks, Sculptures, Gardens, Driveways, Pathways, Flowerbeds, Entrances, Squares, Gardens and as well as landscape architecture.


Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black



PHOTOMETRIC

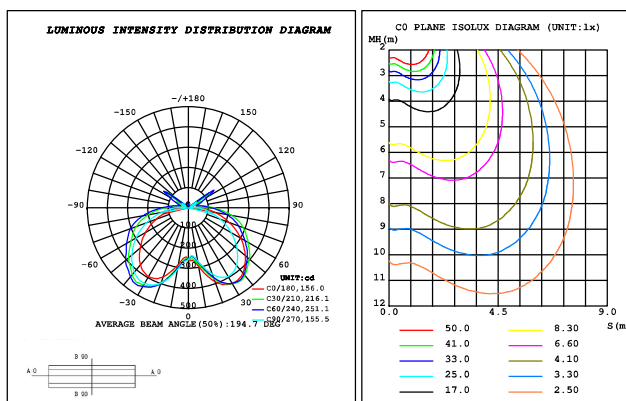

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.30EG
 Operators: K-LITE
 Test Date: 07 December 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: