

BOLLARD 360

Model : ar / bol / p4

**TECHNICAL SPECIFICATION :**

- LED WATT : 06W / 10W / 15W
- Single Color (CCT) : 2750k , 2950k , 4000k, 6000k
- Multi color : RGB
- Lumen / watt : 110 lm - 140 lm
- CRI > 80
- THD < 10%
- PF > 0.95
- LED Type : COB
- LED Make : Edision / Citizen
- Available Beam Angle : 45°, 60°
- Input Voltage : 10V AC / 12V DC
- Dimensions : 30x650 mm
- IP (Ingress Protection) : IP 66 / 67
- Outdoor Casing : All. Dicast
- Driver : Built In / Remote z

PRODUCT DESCRIPTION :

- Luminaire body made of rectangular extruded aluminium tube with aluminium components and SS fasteners.
- Clear toughened glass.
- Mounting plate die cast aluminium double powder coat with an anchorage unit and stainless steel fixing screws.
- Mounting earth spike or die-cast bracket arrangement to facilitate easy installation at any desired location.
- Luminaires supplied with one metre cable length and a IP67 connector.
- Silicone gasket for moisture protection
- Additional cable length to be ordered separately
- Sturdy construction in order to maintain performance of the luminaires and to reduce maintenance costs.

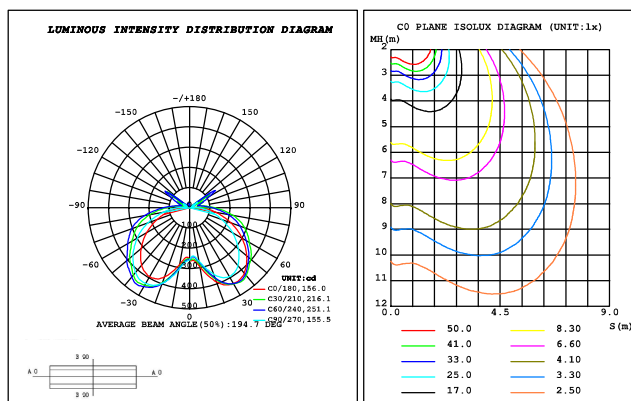
Area of Application

Pathways, Parks, Sculptures, Gardens, Driveways, Pathways, Flowerbeds, Entrances, Squares, Gardens and as well as landscape architecture.

Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black

**PHOTOMETRIC**

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operator: K-LITE
Test Date: 07 December 2021

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: