


MIDI MICRO

Model : arle / ing / k3



TECHNICAL SPECIFICATION :

- LED WATT : 1W / 3W
- Single Color (CCT) : 2750k , 2950k , 4000k, 6000k
- Multi color : RGB
- Lumen / watt : 110 lm - 140 lm
- CRI > 80
- THD<10%
- PF>0.95
- LED Type : Emitter
- LED Make : Edison / Cree
- Available Beam Angle : 15°/25°/ 30°/45°/60° (Asymmetric Lens)
- Input Voltage : 12V / 24V AC/DC - 220V AC
- Dimensions : 50 mm , H 60 mm
- IP (Ingress Protection) : IP 65 / 67 / 68
- Outdoor Casing : PVC / AluminumWire for mains supply cable 2c×1.5mm²
- IP-68 fast connector integrated for cable O.D.6-10mm

PRODUCT DESCRIPTION :

- In-ground up lighter, ground embedded
- Available as a walk over or underwater application
- Construction - SS-304/SS-316 Body
- Outer housing in aluminium with open bottom for water drainage
- For flush recessed mounting in compacted surfaces, pathways and squares
- Generous flange widths for easy covering of holes
- Double silicone gasket for moisture protection
- Toughened step extra clear safety glass 8mm incorporated to avoid dirt contamination
- Extruded aluminium for better heatsink of LED
- For walk over static load maximum 2 ton



Optional : Honeycomb for Anti Glare



Optional : Waterproof Connector IP 68



- Driver : Built - in (IP65/66) Remote : IP 67
- Double Coated High Quality Silicone Cable in IP-67 = 1 mtr, for IP-68 = 1 mtr with gland
- Additional cable length to be ordered separately
- Wire for mains supply cable 3c $\times$ 1.5mm²
- IP-68 connector integrated for cable O.D.6-10mm

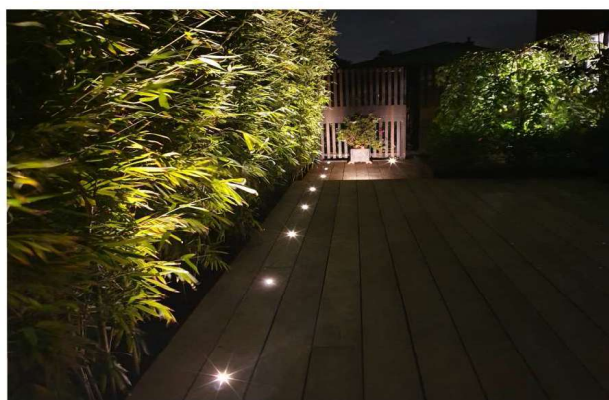

PHOTOMETRIC

